

# Intermat 110° standard hinge

## ▶ Fast assembly hinge without Silent System



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

### Specification

Intermat fast assembly hinge from Hettich. 9943. Opening angle 110° With self closing feature. For door thicknesses from 15 mm to 25 mm.

Door mounting options for:

- Overlay door
- Half overlay
- Inset door

Types:

- different drilling patterns

- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 3. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2.5 mm / - 1.5 mm. Height adjustment at mounting plate.

### Optional features

- ▶ Cover caps for the side arm
- ▶ Opening angle limiter
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 50°/65° corner unit hinge

- ▶ Fast assembly hinge without Silent System for corner unit folding doors



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9930 for corner unit folding doors. Opening angle 50°/65°. With self closing feature. For door thicknesses from 16 mm to 21 mm.

Door mounting options for:

- Overlay door

Types:

- different drilling patterns
- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment. Integrated depth adjustment. Height adjustment at mounting plate. Diagonal adjustment + 9.5 mm / - 9.5 mm

## Optional features

- ▶ Cover caps for the side arm
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 95° aluminium frame door hinge

- ▶ Fast assembly hinge without Silent System for aluminium frame doors



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9936 for aluminium framed doors. Opening angle 95°. With self closing feature. For 19 mm wide aluminium frame profiles

Door mounting options for:

- Overlay door
- Half overlay
- Inset door

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2.5 mm / - 1.5 mm. Height adjustment at mounting plate.

## Optional features


- ▶ Cover caps for the side arm
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 95° thick door hinge

- ▶ Fast assembly hinge without Silent System for doors up to 32mm thick

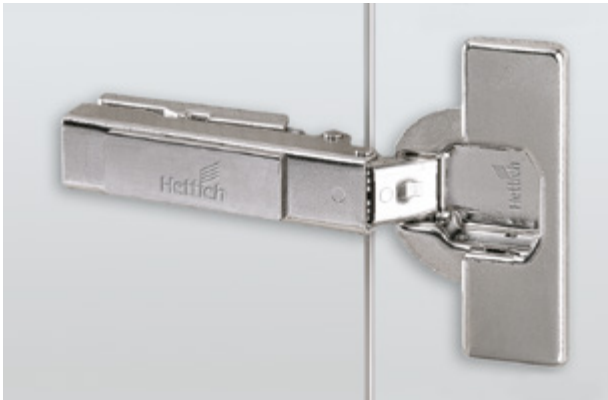

- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9936. 95° opening angle. With self closing feature. For door thicknesses from 14 mm to 32 mm.

Door mounting options for:

- Overlay door
- Half overlay
- Inset door

Types:

- different drilling patterns

- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2.5 mm / - 1.5 mm. Height adjustment at mounting plate.

## Optional features

- ▶ Cover caps for the side arm
- ▶ Opening angle limiter
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 95° Spezial thick door hinge

- ▶ Fast assembly hinge without Silent System for profile doors up to 43mm thick



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9935. 95° opening angle. With self closing feature. For door thicknesses from 16 mm to 43 mm.

Door mounting options for:

- Overlay door
- Half overlay
- Inset door

Types:

- different drilling patterns

- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2.5 mm / - 1.5 mm. Height adjustment at mounting plate.

## Optional features

- ▶ Cover caps for the side arm
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 95° glass door hinge

- ▶ Fast assembly hinge without Silent System for glass doors



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9904 for glass doors. 95° opening angle. With self closing feature. For glass thicknesses from 4.0 mm to 6.5 mm

Door mounting options for:

- Overlay door
- Half overlay
- Inset door

Types:

- different drilling patterns

- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2.5 mm / - 1.5 mm. Height adjustment at mounting plate.

## Optional features

- ▶ Cover caps for the side arm
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 95° angle hinge W45

- ▶ Fast assembly hinge without Silent System for 45° face angle application



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9936 for 45° face angle applications. Opening angle 95° With self closing feature. For door thicknesses from 14 mm to 32 mm.

Door mounting options for:

- Overlay door
- Inset door

Types:

- different drilling patterns
- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2 mm / - 2 mm. Height adjustment at mounting plate.

## Optional features

- ▶ Cover caps for the side arm
- ▶ Opening angle limiter
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)

# Intermat 95° angle hinge W90

- ▶ Fast assembly hinge without Silent System for 90° face angle application



- ▶ Attractive, timeless design from elegant, clean cut lines
- ▶ Concealed clip on installation for easy, tool-less hinge installation
- ▶ Convenient, direct adjustment in three dimensions
- ▶ Optional Silent System for gently closing doors

## Specification

Intermat fast assembly hinge from Hettich. 9936 for 90° face angle applications. Opening angle 95° With self closing feature. For door thicknesses from 14 mm to 28 mm.

Door mounting options for:

- Overlay door
- Inset door

Types:

- different drilling patterns
- different fastening methods

Mounting plates available:

- cross mounting plate
- linear mounting plate

Quality classification under EN 15570, Level 2. Made in Germany. Fast tool-less installation and removal. Integrated overlay adjustment + 2 mm / - 2 mm. Integrated depth adjustment + 2 mm / - 2 mm. Height adjustment at mounting plate.

## Optional features

- ▶ Cover caps for the side arm
- ▶ Opening angle limiter
- ▶ Optional Silent System



Further information: [www.hettich.com](http://www.hettich.com)